



### Product Features

- Input voltage range: 180~305Vac;
- Constant power design, outputs programmable;
- Output current reconfigurable by infrared controller;
- 3-in-1 dimmable (M types): 0~10Vdc / PWM signal / Timer dimming;
- Surge protection: 5KV line-line, 10KV line-earth;
- Protections: SCP / OVP / OTP;
- IP67 design for indoor and outdoor applications;
- Suitable for dry / damp / wet locations;
- 5 years warranty

### Application

- Suitable for LED architecture lighting, industrial lighting, flood lighting, and roadway lighting, etc.

### DESCRIPTION

The EDC-150W series is 150W outdoor programmable LED driver that operates in constant current model. Monitored by an infrared based programming device, the fully programmed drivers offer all dimming options and a wide range of output current in a single driver, which deliver maximum flexibility with customized operating settings and intelligent control options for lighting manufacturers, as one driver can be programmed for many different luminaire designs. EDC provides built-in timer dimming schedules further increasing the energy savings and CO<sub>2</sub> reductions achieved with LED lighting. It also helps clients to improve the management of logistics and stock. The compact metal case and high efficiency enables the driver to operating with high reliability, and extending product lifetime. Overall protection is provided against lightning surge, output over voltage, short circuit, and over temperature, to ensure low failure rate.

### MODELS


Model Number [1]	Max Output Power (W)	Output Voltage Range (Vdc)	Output Current Adjustable Range (A)	Full Power Current Adjustable Range (A) [2]	Default Output Setting	Typical Efficiency [3]	Typ. THD	Typ. PF
EDC-150X036	150	20~36	0.42~4.20	4.20	20~36V/4.20A	91%	15%	0.96
EDC-150X062	150	25~62	0.30~3.00	2.42~3.00	25~50V/3.00A	92%	10%	0.96

**Notes:** [1]. X can be M or R, means dimmable or non-dimmable. Take EDC-150X036 for example, EDC-150M036 is programmable and 3-in-1 dimmable; EDC-150R036 is programmable and timer dimmable;

[2]. Output current adjustable range with constant power at max output power;

[3]. All specifications are measured at 25°C ambient temperature, if no specific note.

### OPERATING AREA I-V

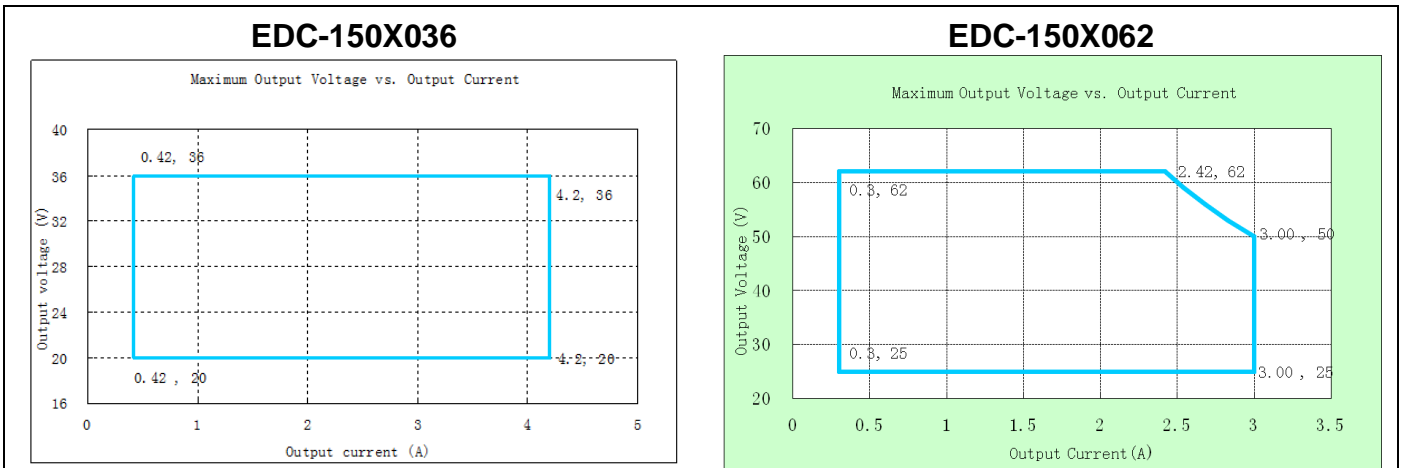

### INPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	180Vac	200-277Vac	305Vac	
Input Frequency	47Hz	50/60 Hz	63Hz	
Leakage Current	-	-	0.75mA	277V/50Hz
Input AC Current	-	-	1.2Amax	200-277Vac & full load
Inrush Current	-	-	75A	230Vac & full load, Ta=25°C cold start.
Power Factor	0.96	0.98		230Vac & full load
THD	-	10%	15%	230Vac, & full load

## OUTPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%Iset	-	5%Iset	Full load
Output Current Setting Range (Iset)				
EDC-150X036	0.42A	-	4.20A	
EDC-150X062	0.30A		3.00A	
Output Current Setting Range with Constant Power				
EDC-150X036	4.20A	-	4.20A	
EDC-150X062	2.42A		3.00A	
Total Output Current Ripple (pk-pk)			16%	230Vac & full Load, load is LED, ripple is different with difference LED load.
Startup Overshoot Current		-	10%	200~277Vac & 100% Load, load is LED
No Load Output Voltage				
EDC-150X032	-	-		
EDC-150X062			40V 72V	
Line Regulation	-	-	1%	25°C±10°C ambient temperature, input voltage changes from 200Vac to 277Vac.
Load Regulation	-	-	3%	25°C±10°C ambient temperature, 230Vac input, load changes from 50% to 100%.
Turn-on Delay Time	-	-	3S	200~277Vac, 100% load

## GENERAL SPECIFICATIONS

Parameter		Min.	Typ.	Max.	Notes
Efficiency @230Vac					
EDC-150X036					Measured at full load and 25°C ambient temperature
	Io=4.2A	90%	92%		
EDC-150X062					
	Io=2.42A	91%	92%		
	Io=3.00A	91%	92%		
Efficiency @277Vac					
EDC-150X036					Measured at full load and 25°C ambient temperature
	Io=4.2A	90%	91%		
EDC-150X062					
	Io=2.42A	91%	92%		
	Io=3.00A	91%	92%		
Dielectric Strength	Input-Output	-	3750Vac	-	10mA/60S
	Input-PE	-	1600Vac	-	
	Output- PE	-	1600Vac	-	
Grounding Resistance		-	-	0.1Ω	25A/60S
Insulation Resistance		50MΩ	-	-	Input-Output, Input-PE, Output-PE, 500Vdc/60S/25°C/70%RH
MTBF		-	200000 Hours	-	230Vac,80% load (MIL-HDBK-217F)
Lifetime		-	50000 Hours	-	230Vac&80% load, 45°C ambient temperature, refer to lifetime VS Tc curve for details
Operating Case Temperature for Safety Tc_s		-40°C	-	+85°C	
Operating Case Temperature for Warranty Tc_w		-40°C	-	+60°C	
Storage Temperature		-40°C	-	+85°C	Humidity: 20% to 100% RH
Dimensions (LxWxH)mm		L178xW68xH39mm			
Net Weight		755±50g/PCS			
Package		L500*W310*H60mm; 10pcs/Ctn.			

## DIMMING

Parameter		Min.	Typ.	Max.	Notes
0~5V/0~10V Absolute Maximum Voltage on the Vdim (+) Pin		-	5V/10V	-	
0~5V/0~10V Source Current on Vdim(+)Pin		-	-	2mA	
Dimming Output Range	EDC-150X032 EDC-150X062	10%Imax	-	100%Imax	Imax=4.2A Imax=3.0A
	EDC-150X032 EDC-150X062	0.42A 0.30A	-	4.20A 3.00A	
Recommended Dimming Range for 0-5V		0V	-	5V	Default 0-10V/10V PWM Dimming
Recommended Dimming Range for 0-10V		0V	-	10V	
PWM_in High Level		9.7V	-	10.3V	
PWM_in Low Level		0V	-	0.3V	
PWM_in Frequency Range		250Hz	-	1000Hz	
PWM_in Duty Cycle		1%	-	99%	

## SAFTY STANDARDS

Safety Category	Country / Territory	Standards
CCC	China	GB19510.1, GB19510.14
CE	China	EN61347-1, EN61347-2-13
CB	CB Countries	IEC61347-1, IEC61347-2-13
BIS	India	IS 15885(PART 2/SEC 13)
UL	USA	UL 8750
CUL	Canada	CSA C22.2 No.250.13
KC	South Korea	K61347-1, K61347-2-13, K62384
PSE	Japan	J61347-1, J61347-2-13
SAA	Australia	AS/NZS IEC 61347-2-13
		AS/NZS 61347.1


## EMC COMPLIANCE

EMC Category	Country / Territory	Standards
CCC	China	GB 17743, GB 17625.1
CE	Europe	EN 55015, EN 61000-3-2, EN 61000-3-3
		EN61000-4-2,3,4,5,6,8,11
		EN 61547
KC	South Korea	K61547
		K00015
PSE	Japan	J55015
FCC	USA	FCC part 15

### NOTE:


This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

### INRUSH CURRENT WAVEFORM

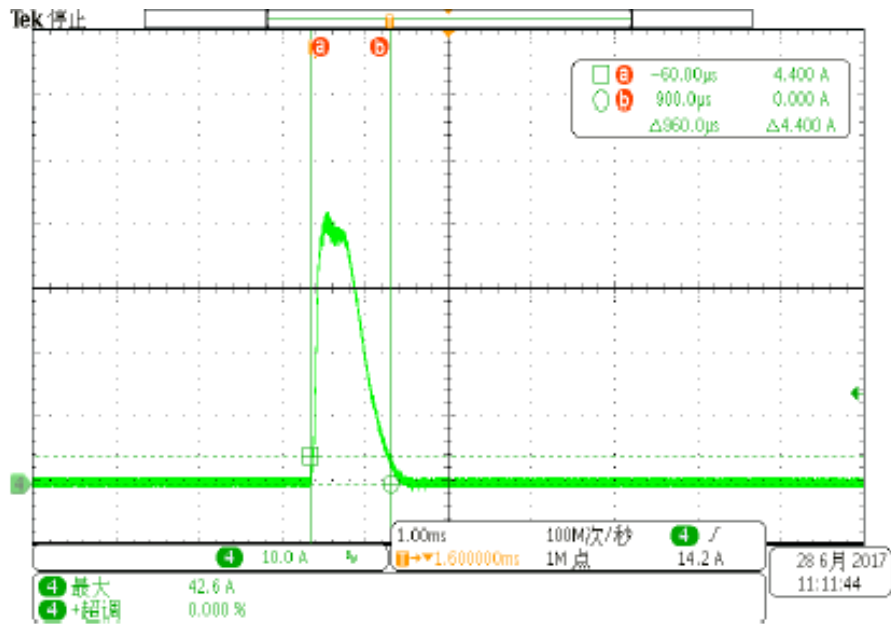


### DERATING CURVE


Derating Curve

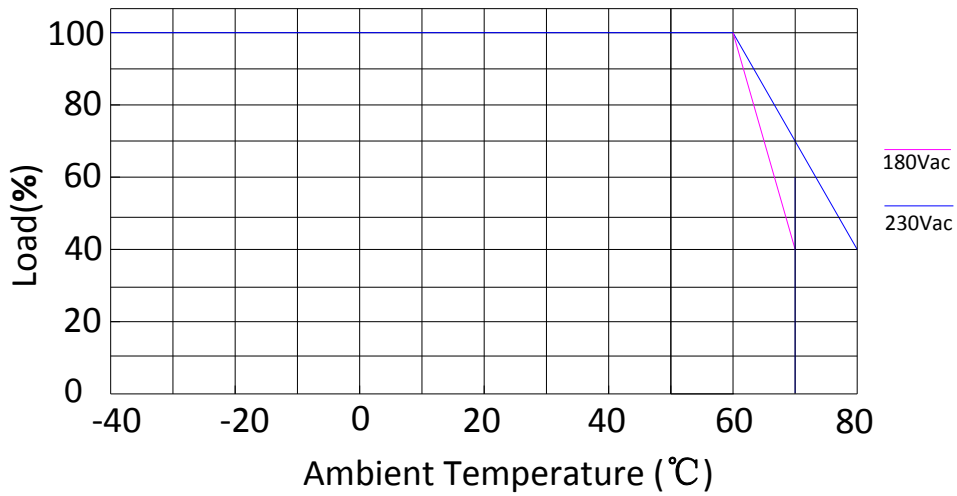


### LIFETIME VS TEMPERATURE

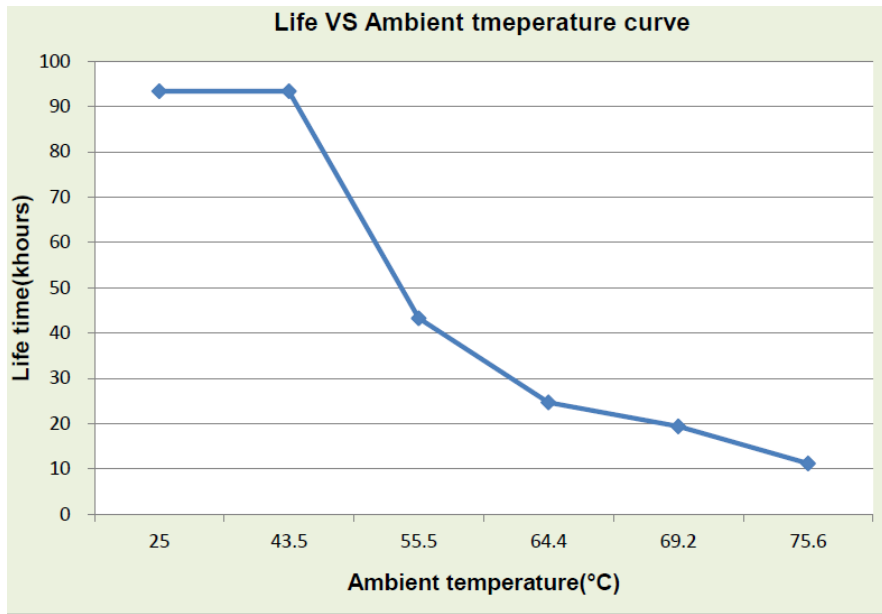

### EFFICIENCY VS LOAD

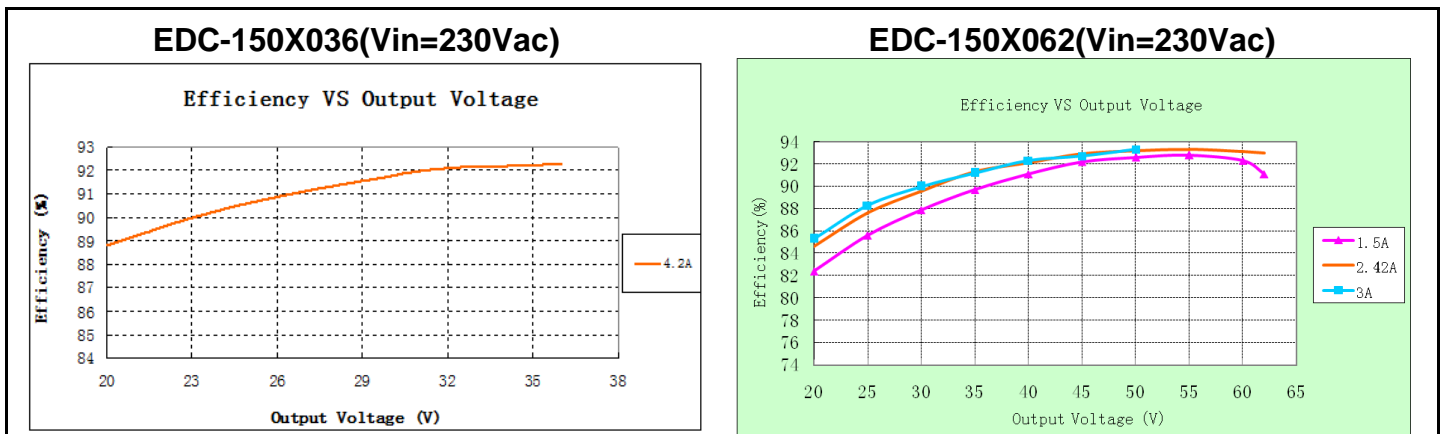


### POWER FACTOR VS LOAD

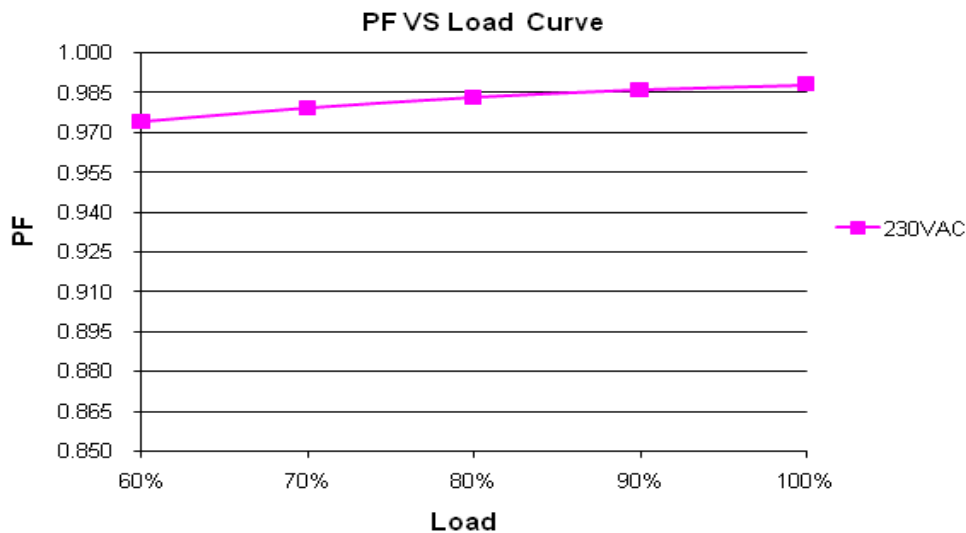

### TOTAL HARMONIC DISTORTION


THD vs. Load Curve

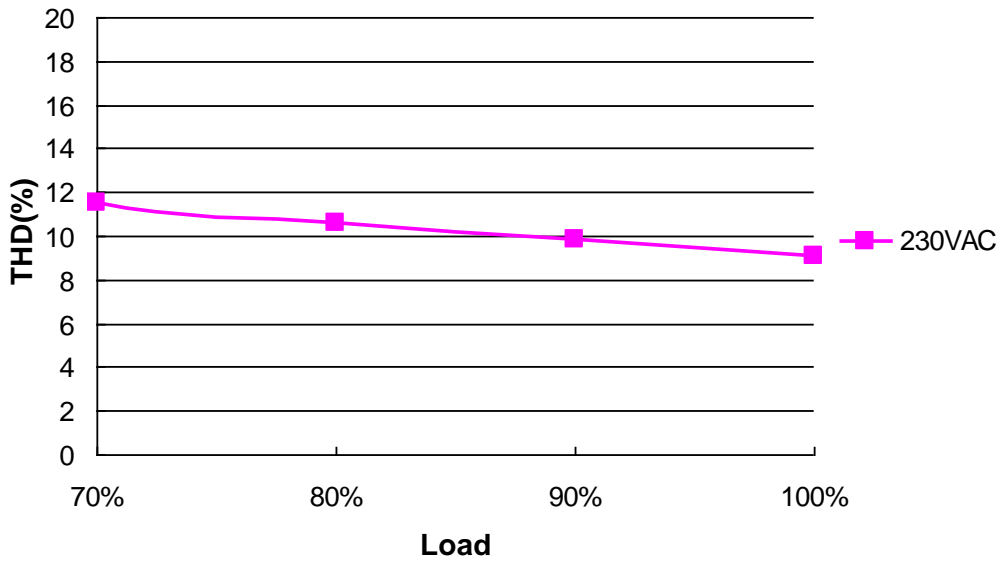

### PROTECTIONS


Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed. The max derating could be 30% (typ.).
Short Circuit Protection	Hiccup mode and auto recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage Protection	Run into protection model when output voltage exceeds limit, and return to normal when the fault

### 0-10V/PWM DIMMING

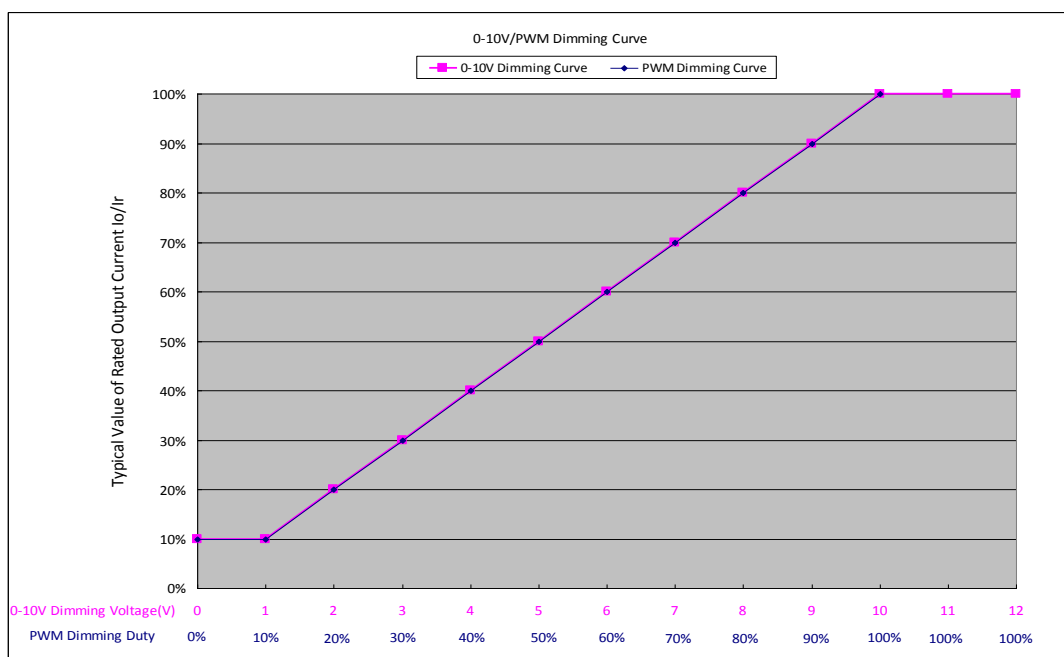



### PROGRAMMING CONNECTION

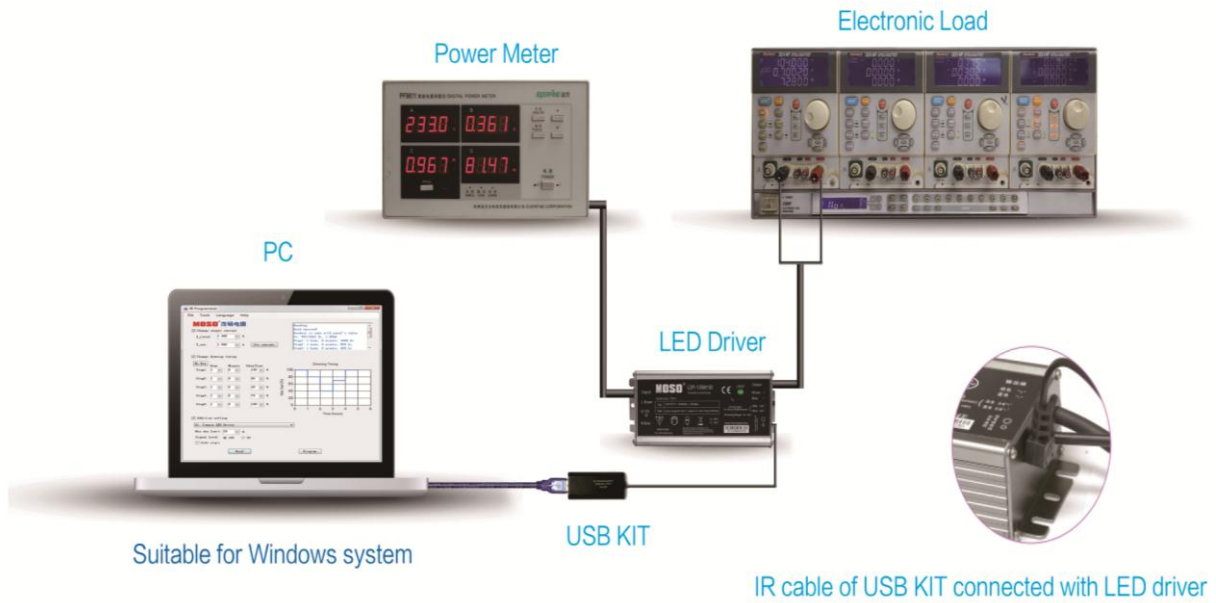

### PROGRAMMING GUIDE AND SOFTWARE INTERFACE

File Tools Language Help

**MOSO<sup>®</sup> 茂硕电源**

Checking connection...  
Connected to COM5

Change output current

I\_rated: 1.100 A

I\_out: 0.700 A

Change dimming timing

Step	Hour	Minute	SS	Idim/Iout
Step1:	0	0	55	50 %
Step2:	5	0		100 %
Step3:	3	0		80 %
Step4:	2	0		50 %
Step5:	1	0		100 %

Addition setting

01. Common LED Driver

Min dim limit: 20 %

Signal level:  10V  5V

Soft start

Dimming Timing

Idim / Iout (%)

Time (hours)

- Programming by Software:**
- 1) Read existing setting of the driver
  - 2) Change output current;
  - 3) Set timer dimming schedules;
  - 4) Addition setting
    - Set min. dim value;
    - Set signal level can be 5V or 10V;
    - Set soft start.

### USING INFRARED CONTROLLER TO RESET OUTPUT CURRENT



**Operation Instruction:**


- 1) Insert cable terminal of the infrared controller into the infrared communication port, which is at the DC output side of the LED driver.
- 2) Press "ON" key to power on the controller;
- 3) Within 10S interval, press a function key to adjust output current to the percentage of max delivered current;
  - 10%-100%: Percentage of maximum output current of such driver.
  - + / - : Fine adjustment of output current, increase / decrease 1% each time.
  - ON: Power on controller.
  - OFF: Set min output current of such driver.
  - SE: No function.

**Warning:**


- Please do not hold "+"key, to avoid the over power protection and unstable output.
- Each step of operation should be done within 10S interval, otherwise the controller is power off automatically.

### MECHANICAL OUTLINE

EDC-150M types

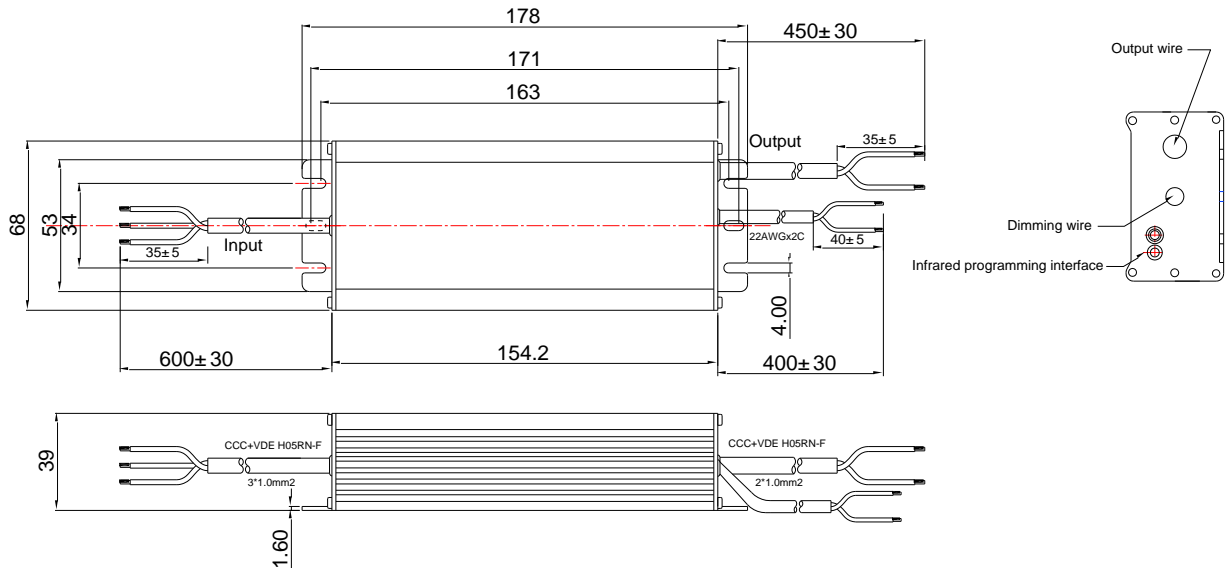

EDC-150R types

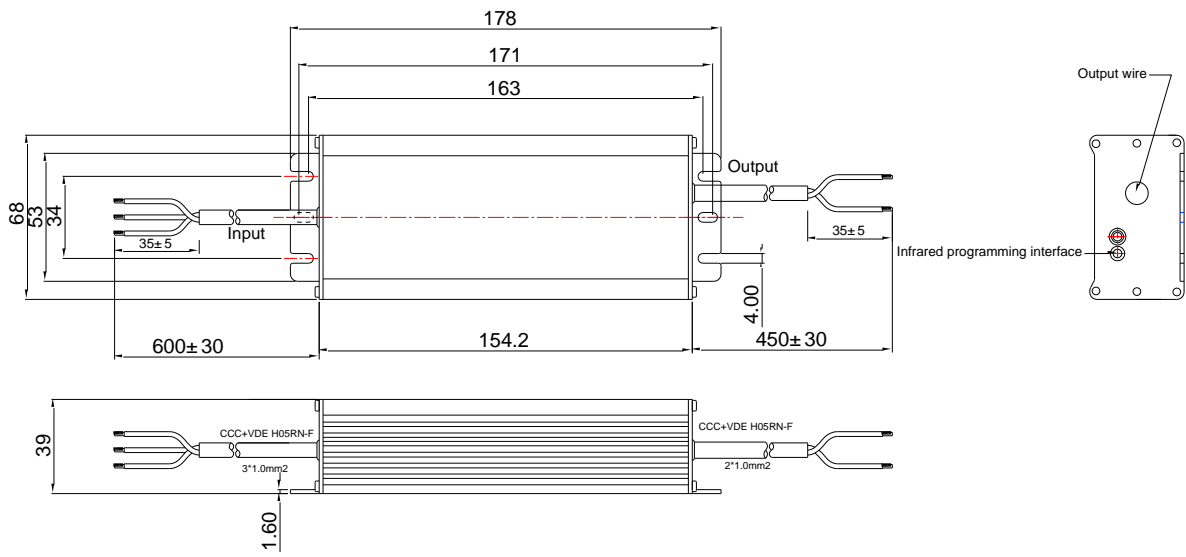

**REVISION HISTORY**

Version	Description of Change		Date	Notes
	Before	Now		
A.1	—	Datasheets Release	2018-02-28	